

Features:

- Two-way active speaker with one 15" woofer and one 2" driver.
- Cabinet is made from polypropylene and special high-tech material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 12" woofer is made from \varnothing 75mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable 50-100°x55° (HxV) dispersion horn makes it suitable for any performance purposes.
- Molded-in pole mount, easily suspended.
- Vertical or horizontal layout, can be used as a monitor or in any flying systems.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.




Technical Parameters



Beta Three

System:	Built-in crossover two way full range active speaker
Driver Quantity:	12" LF Woofer And 44 mm HF Compression Driver
Frequency Response(-3dB):	50 Hz-18 kHz
Frequency Response(-10dB):	40 Hz-20 kHz
Max.SPL (1m):	118dB
Level Adjust range:	± 10 dB(100 Hz)-Bass ± 10 dB(10 kHz)-Treb
Power(RMS):	300 W LF, 100 W HF
Power(PROGRAM):	600 W LF, 200 W HF
Power(MAX):	1200 W LF, 400 W HF
Distortion:	Line-0.02%, Microphone-0.04%
Rotatable horn(HxV):	50°-100°x55°
Load impedance:	Treb - 8 Ohm, Bass - 8 Ohm
Input impedance:	Line - 20 kOhm, Microphone - 10 kOhm
Connectors:	XLR K3P
Power supply:	240V \sim $\pm 10\%$ /50 Hz
Dimensions(WxDxH mm/pcs):	415x391x600 mm
Packing Dimensions(WxDxH mm/pcs)	465x435x680 mm
Net Weight(kg/pcs):	23.0 kg
Gross Weight(kg/pcs):	25.2 kg

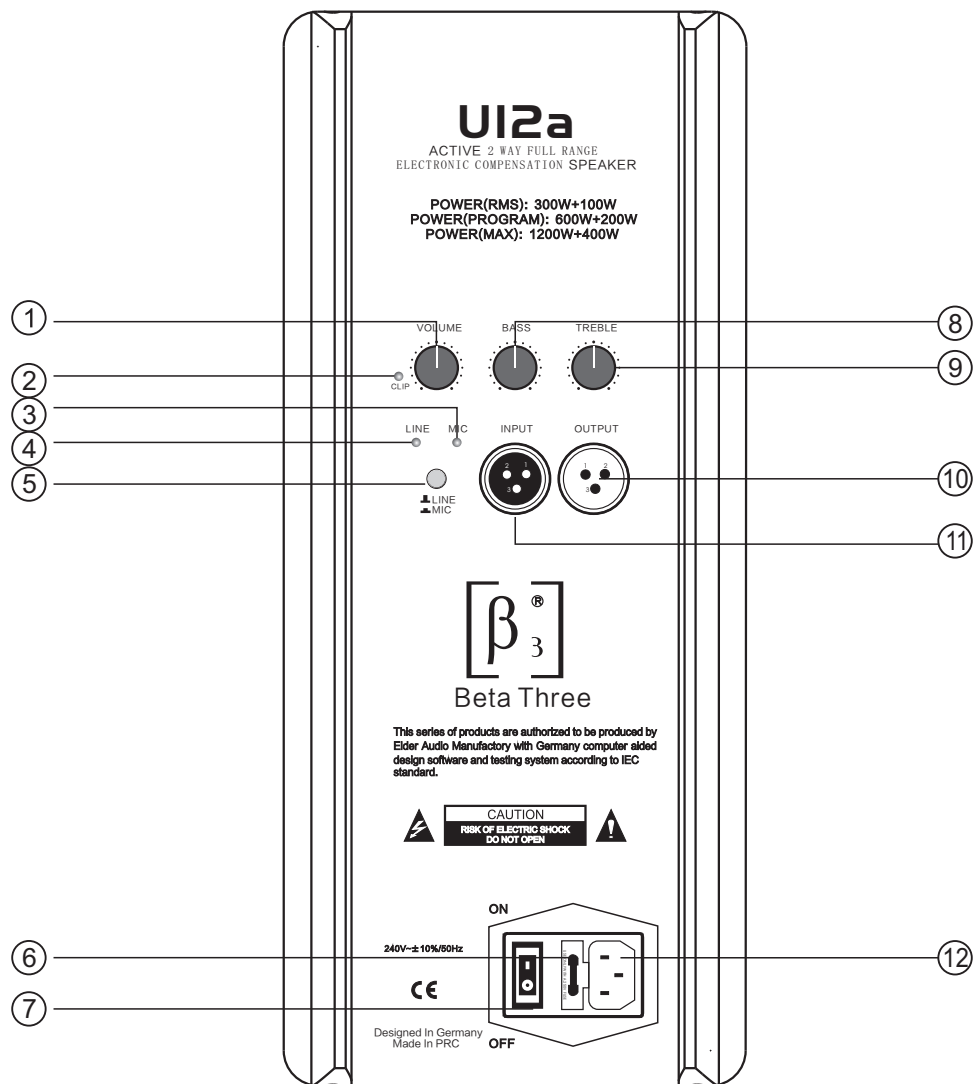

- | | |
|---|---|
| <ol style="list-style-type: none"> 1. Volume control. 2. Clip indicator. 3. Microphone input signal presence indicator. 4. Line input signal presence indicator. 5. Line/microphone selector. 6. Protection fuse. Use only fuses of the correct amp rating. | <ol style="list-style-type: none"> 7. Power ON/OFF switch. 8. Bass control. 9. Treble control. 10. Line/microphone output. 11. Line/microphone input. 12. Power supply input. Make sure that the voltage selector is set for your country's correct voltage. |
|---|---|

Cosmetic changes may be made