

















FULL RANGE PROFESSIONAL SPEAKER

Features:

Two transducers two way phase-reversed full range professional speaker, professional and efficient transducers, computer simulating design.


Two transducers two way full range
High SPL and sensitivitity speaker
One 12" big power low frequency transducer
One compression driver with 3" titanium diaphragm
Drived by one amplifier 80° × 50° width direction to
get more widely enlarge capability
With computer optimize simulated design to get better
frequency and phrase features
Multiple flexible installation methods
Suitable for full sound field enlarge, club and dancery
etc publics using
Suitable for any big sound engineering project or enlarge,
returning listen, repair listen of fluxion performance system
Used for high quality output replaying music,
Can be assorted with Σ B115H 、 Σ B118D 、 Σ B218 high
canacity hass hox





Specifications:


Fequency Response(-3dB):	60Hz-16KHz
Sensitivity(1m/1W):	97dB
Crossover Frequency:	2.5KHz
Dispersion($H \times V$):	80° ×50°
Rated Power(RMS):	250W
Rated Impedance:	8 Ohm
DC Impedance:	5.6 Ohm
THD:	<3 %
Input Connectors:	NL4×2
Net Weight(1Pcs):	25Kg
Gross Weight:	29Kg
Dimensions (W \times D \times H):	$397 \times 370 \times 600$ mm
Packaging Dimensions 1pcs/pack(W \times D \times H):	$505 \times 480 \times 720$ mm

Cabinet Dimension:












Installation drawing:





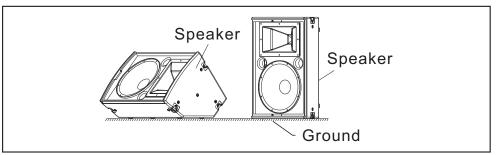



ZS212/85FULL RANGE PROFESSIONAL SPEAKER