


# MU404a

4" Two Way Full Range Active Column Speaker

## DESCRIPTION

MU404a active line array column loudspeakers are used in applications including sound reinforcement for Houses of Worship, Events, Theme Parks, Transit Terminals and Shopping Malls etc. The T series delivers extraordinary performance where high speech intelligibility and natural sounding music is required at unmatched value.

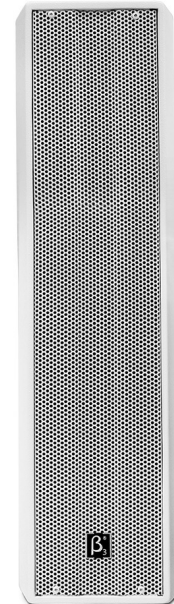

## FEATURES

- Vertical line array of 4 x 4" LF driver
- 44mm compression driver loaded with wave guide
- Frequency response 160Hz-20kHz(-3dB)
- Sensitivity 88dB, MaxSPL 109dB
- 150 x 30 degree controlled coverage pattern
- Birch plywood construction
- Durable Polyurethane textured base paint
- Quick install U bracket included with multiple mounting points provided
- Designed for high speech intelligibility and natural sounding music
- Optional MU404 hanging hardware

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response(-3db):	100Hz-20kHz
	Max SPL @ 1m:	109dB/115dB(PEAK)
	Dispersion (H x V):	150° x 30°
Transducers	Compression driver:	1 x 44mm HF
	Woofer:	4 x 4" LF
Input/Output section	Input signal:	Balanced 20kΩ, Unbalanced 10kΩ
	Input Connectors:	4-screw termina, 2 x XLR
Power section	Total Power:	200W(RMS); 400W(MUSIC); 800W(PEAK);
	Voltage range:	AC 220V-240V~, 50/60Hz (or AC 110V-120V~, 50/60Hz)
Physical specifications	Cabinet/Case Material:	15mm birch plywood
	Hardware:	6 x M8
	Grille:	White Polyurethane painting for cabinet & White Powder coated grille.
	Color:	White
Size	Dimension (W x D x H):	144 x 692 x 235mm / (5.7 x 27.2 x 9.3in)
	Package Dimensions (W x D x H):	215 x 772 x 235mm / (8.5 x 30.4 x 9.3in)
Weight	Net Weight:	10 kg / 22 lb
	Gross Weight:	11 kg / 24.3 lb