



# $\Sigma 5215/85$

Toasting paint speaker

User's manual



ED-B3-MA-050326-005



## Features:


- **Two transducers two way phase-reversed full range professional speaker, professional and efficient transducers, computer simulating design.**
- ☐ Two transducers two way full range
- ☐ High SPL and sensitivity speaker
- ☐ One 15" big power low frequency transducer
- ☐ One compression driver with 3" titanium diaphragm
- ☐ Driven by one amplifier  $80^{\circ} \times 50^{\circ}$  width direction to get more widely enlarge capability
- ☐ With computer optimize simulated design to get better frequency and phrase features
- ☐ Multiple flexible installation methods
- ☐ Suitable for full sound field enlarge, club and dancery etc publics using
- ☐ Suitable for any big sound engineering project or enlarge, returning listen, repair listen of fluxion performance system
- ☐ Used for high quality output replaying music,
- ☐ Can be assorted with  $\Sigma$ B115H、 $\Sigma$ B118D、 $\Sigma$ B218 high capacity bass box




## Specifications:

Frequency Response(-3dB):	50Hz-16KHz
Sensitivity(1m/1W):	97dB
Crossover Frequency:	2.5KHz
Dispersion(H×V):	$80^{\circ} \times 50^{\circ}$
Rated Power(RMS):	250W
Rated Impedance:	8 Ohm
DC Impedance:	5.6 Ohm
THD:	<3%
Input Connectors:	NL4×2
Net Weight(1Pcs):	33Kg
Gross Weight:	37Kg
Dimensions (W×D×H):	462×440×720mm
Packaging Dimensions 1pcs/pack(W×D×H):	570×550×840mm

Cabinet Dimension:

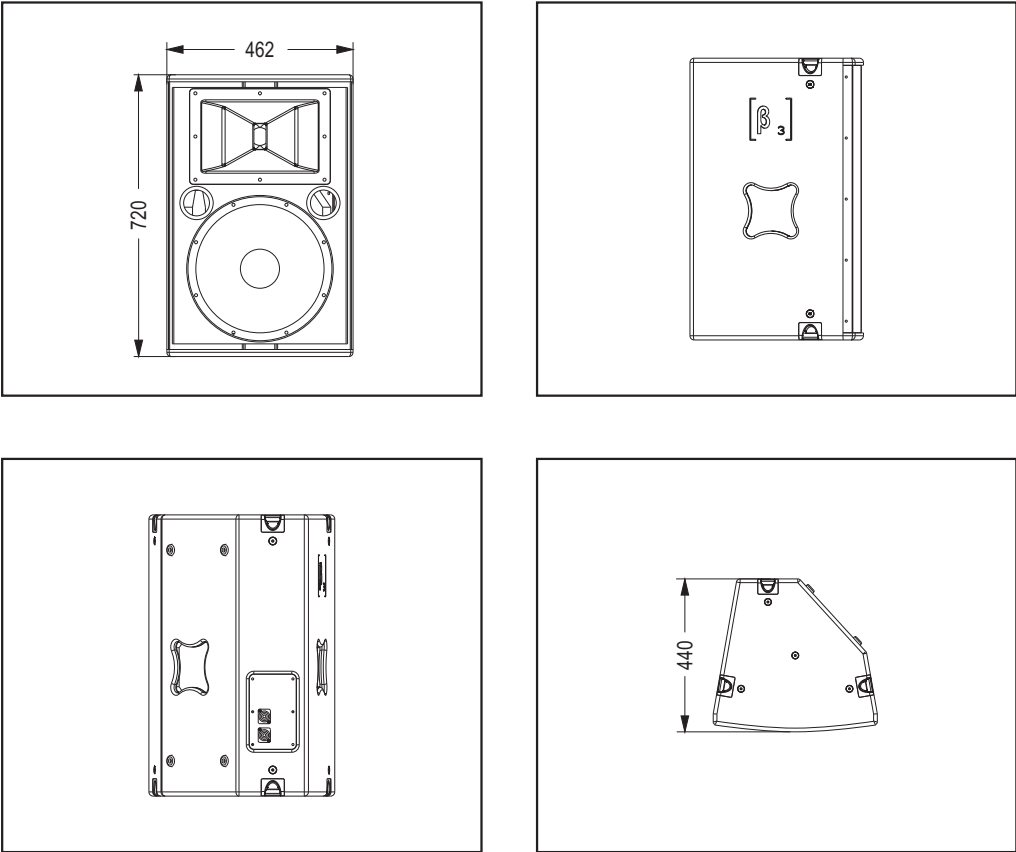

Installation drawing:

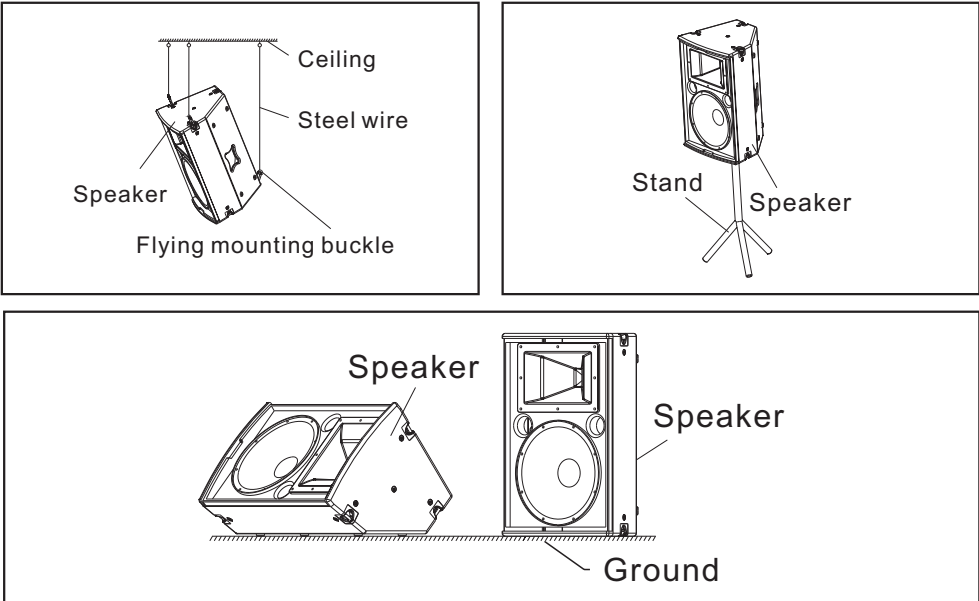

**ΣS215/85**  
**FULL RANGE PROFESSIONAL SPEAKER**